
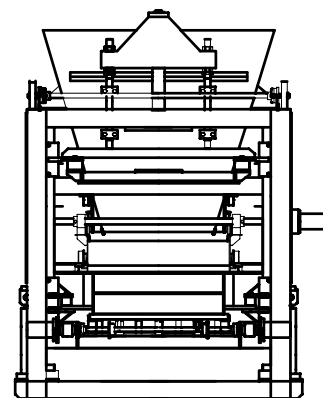


ABS 20

BRETTFERTIGER Pallet production machine

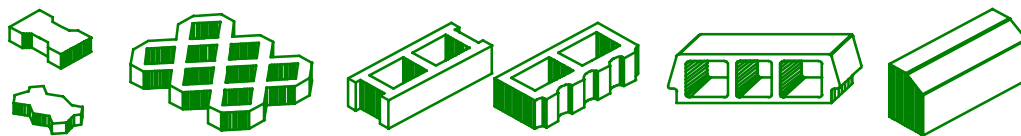

Steinformmaschine ABS 20

- kompakt, stabil und sehr zuverlässig
- einfache Bedienung
- gute Zugänglichkeit der einzelnen Maschinenteile
- geringer Wartungsaufwand

Herstellung von:

Hohlblöcken,
Vollblöcken,
Deckensteinen,
Pflastersteinen,
Bordsteinen,
Rasenplatten,
etc.

Technische Beschreibung:

- mittlere Kapazität
zum Beispiel:
250 - 300 m² Pflastersteine pro Schicht (8 Std)
- Brettgrößen von:
700 x 500 x 35 mm
- Arbeitshöhe:
50 bis 300 mm
Sonderhöhe auf Anfrage
- Brettmagazin integriert
mit hydraulischem Brettvorschub
- externes Hydraulikaggregat
- Steuerung:
Vollautomatisch mit Bedienpult für alle Maschinenfunktionen
- Vorsatzeinrichtung
alle mechanischen Teile in einem Verstell-Rahmen montiert
zur nachträglichen Ausstattung geeignet
- Vibrationstisch
mit leistungsstarkem vollsynchronisiertem Rüttelsystem,
leicht einstellbar für jedes Betonprodukt

optimale Verdichtung,
hohe Steinqualität,
DIN-Prüfzeichen
- Führungssäulen hartverchromt

Maße:

Maschinenhöhe:	max. 3100 mm
Maschinenbreite:	ca. 1300 mm
Maschinenlänge:	3000 mm
Maschinenlänge mit Vorsatz:	4000 mm
Gewicht:	ca. 2,3 t
Gewicht mit Vorsatz:	ca. 3,4 t

Technische Änderungen vorbehalten

Block making machine ABS 20

- compact and very reliable
- easy operation
- every parts of the machine are easy accessible
- low maintenance required

For the production of:

hollows blocks,
solid blocks,
ceiling/flooring blocks,
paving stones,
curb stones,
turf stones/slabs,
etc.

Technical description:

- medium capacity
for example:
250 - 300 m² paving stones per shift (8 hours)
- pallet sizes from:
700 x 500 x 35mm
- production height:
50 to 300 mm
special height at request
- built- in pallet magazine
with hydraulic pallet support
- external hydraulic power-unit
- control:
fully automatic with separate control panel for all functions
- facing concrete device
the mechanical parts are mounted in an adjustable frame
subsequent order possible
- one-piece vibrating-table
with a heavy-duty vibration system, fully synchronized
easy adjustable for any kind of concrete block/element

optimal compaction,
high product quality according,
to German Standards (DIN)
- guide columns hard chrome-plated

Measures:

machine height:	max. 3100 mm
machine width:	approx. 1300 mm
machine length:	3000 mm
machine length incl. facing device:	approx. 4000 mm
weight:	approx 2,3 t
weight incl. facing device	approx 3,4 t

design details subject to variation